

Spreader Beams

Model 32 - Adjustable Spreader Beams




Shown with Option C

Specify Top Rigging

PRODUCT FEATURES:

- Ideal where headroom is not limited.
- Adds stability to lift.
- Choose from a wide range of sizes and capacities.
- Telescoping adjustment at 12 inch increments.
- Select chain or wire rope top rigging.
- Custom designs available.
- Complies with ASME standards.

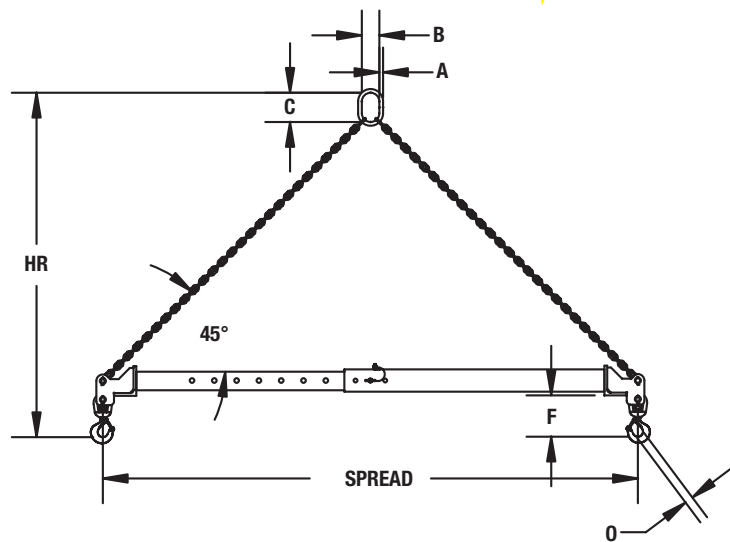

SPECIFICATIONS

| Capacity (tons) | Model Number | Spread (ft) Min / Max | Headroom Min/Max (in.) | Beam & Hook Weight (lbs.) | A Oblong Dia (in.) | B Oblong Width (in.) | C Oblong Height (in.) | F - Hook to beam Bottom (in.) | O - Hook Opening w/ latch (in.) | Chain Rigging Weight (lbs) |
|-----------------|--------------|-----------------------|------------------------|---------------------------|--------------------|----------------------|-----------------------|-------------------------------|---------------------------------|----------------------------|
| 20 | 32-20-7/11 | 7 / 11 | 93/107 | 430 | 1.75 | 6.0 | 12.0 | 14.2 | 2.27 | 175 |
| | 32-20-9/15 | 9 / 15 | 123/144 | 540 | | | | | | 225 |
| | 32-20-12/20 | 12 / 20 | 151/180 | 822 | | | | | | 275 |
| 25 | 32-25-7/11 | 7 / 11 | 98/107 | 430 | 2 | 7.0 | 14.0 | 14.2 | 2.27 | 240 |
| | 32-25-9/15 | 9 / 15 | 119/141 | 540 | | | | | | 295 |
| | 32-25-12/20 | 12 / 20 | 149/179 | 825 | | | | | | 365 |
| 30 | 32-30-7/11 | 7 / 11 | 102/115 | 615 | 2 | 7.0 | 14.0 | 18.3 | 3.02 | 240 |
| | 32-30-9/15 | 9 / 15 | 124/145 | 750 | | | | | | 295 |
| | 32-30-12/20 | 12 / 20 | 154/183 | 1065 | | | | | | 365 |
| 40 | 32-40-7/11 | 7 / 11 | 105/118 | 620 | 2.25 | 8.0 | 16.0 | 18.3 | 3.02 | 375 |
| | 32-40-9/15 | 9 / 15 | 127/148 | 840 | | | | | | 470 |
| | 32-40-12/20 | 12 / 20 | 154/184 | 1500 | | | | | | 565 |

TOP RIGGING OPTIONS

OPTION C

Chain top rigging from beam to crane hook.

OPTION W

Wire rope top rigging from beam to crane hook.



The Caldwell Group • 800-628-4263 • www.caldwellinc.com

Strong-Bac® Section
2009-2010 Master Catalog