

Clamps, Grabs & Tongs



The Caldwell Group • 800-628-4263 • www.caldwellinc.com

Model BFC - Beam Flange Clamps

NEW SIZES



OPTION LB
Large Bail

IN-STOCK PROGRAM


PRODUCT FEATURES:

- Rated load capacities from 1 to 10 metric tons.
- Lightweight and portable design.
- Left-hand thread and right-hand thread screw spindle allows for rapid clamping and unclamping.
- Jaw opening adjusts to a wide range of beam types and flange widths.
- Use only for vertical lifting.
- Built-in suspension pin provides lower headroom.
- Available with Large Bail option for oversized hoist hooks.
- Complies with ASME standards.

SPECIFICATIONS

Model Number	Rated Capacity (lbs.)	Dimensions (inches)											Weight (lbs.)
		D		E	F	G	H Diameter	J	Option LB				
		Min.	Max.	Max.					A	B	C	T	
BFC-1	2200	3.00	7.50	12.25	3.00	9.25	0.88	2.10	0.75	2.00	2.00	0.63	8
BFC-2	4400	3.00	7.50	12.25	3.00	9.25	0.88	2.10	0.75	2.00	2.00	0.63	9
BFC-3	6600	6.00	12.00	19.75	4.25	11.00	1.25	2.38	1.00	2.50	2.50	1.00	19
BFC-5	11000	6.00	12.00	19.75	4.25	11.00	1.25	2.38	1.00	2.50	2.50	1.00	22
BFC-10	22000	6.00	13.25	22.50	6.00	14.63	1.75	4.65	1.38	3.75	6.25	1.25	50

NOTE: Weights are for clamp only, they do not include large bail option.

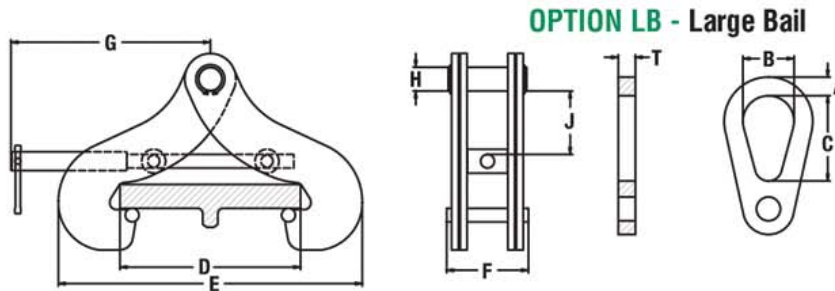

Applications



Allows for the capability of hanging hoists or rigging from an overhead load bearing structure.



For lifting and positioning structural beams. Can be used in pairs in conjunction with a spreader beam for additional versatility.